



Creating healthy spaces



# Topfix®

The first sunprotection-screen applicable to withstand extreme wind loads

## Description

RENSON® Sunprotection-Screens introduces the Topfix®: zenithal sunprotection using a revolutionary new tension technology: a combination of our well-known Fixscreen® technology and a specific tension system. The result is exceptional fabric tension, even in cases of extreme wind loads up to 120 kph\*. Flapping and ruptured fabrics are a thing of the past. The compact box fits perfectly within every design.

The zenithal sunprotection prevents overheating in light panels, skylights and small conservatories. Complete blackout is possible by means of blackout fabrics whether used inside or outside and this until 18 m<sup>2</sup> (coupled).

## Product

- Sunprotection with excellent fabric tension
- Intelligent wind-resistant guide system using the Fixscreen® technology
- Extremely wind tight: warranty up to 120 kph in closed position\*
- Motor control
- Compact design
- Frames available anodised or powdercoated in any RAL colour
- Soltis® polyester fabric in a wide range of colours or Soltis® blackout polyester fabric.

## Applications

- For all kinds of vertical, horizontal or inclined glazing: such as light panels, sloping or pitched roofs, skylights, conservatories, etc.
- For all window types: aluminium, wood, PVC
- For new buildings as well as renovation projects
- For private homes and public buildings: hospitals, care homes, offices, schools, etc.
- Top-bottom fitting
- Suitable for inside and outside use


## Technical features

- Maximum dimensions:
  - Single: W 4000 mm x P 3000 mm - **NEW!**
  - Double: W 6000 mm x P 3000 mm
- Aluminium frame: W 105 x H 100
- Inclination from 0° to 90°.
  - For Horizontal installation (outside application):
    - No minimum slope is required for Soltis® 86
    - A min slope of 8° for Soltis® 92/93/B92

## Guarantee

- 5 year product warranty
- 10 year colour coating warranty
- In accordance with EN 13561, wind class 3
- Declaration of performance (DOP) 201409-F006
- Warranty up to 120 km/h in closed position\*

\* Wind tunnel test by Von Karman Institute: No. EAR0852

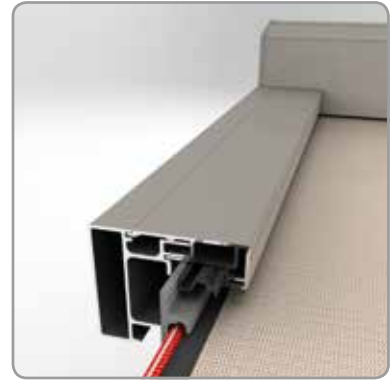

Side channel: Fixscreen® technology



RENSON® reserves the right to make technical changes to the products shown. The latest brochures may be downloaded from [www.renson.eu](http://www.renson.eu)

RENSON® Export Department • Tel. +32 (0)56 62 71 11 • [export@renson.net](mailto:export@renson.net)

RENSON® Sunprotection-Screens NV  
IZ 1 Flanders Field • Kalkhoevestraat 45 • B-8790 Waregem  
Tel. +32 (0)56 62 65 00 • Fax +32 (0)56 62 65 09  
[export@renson.be](mailto:export@renson.be) • [www.renson.eu](http://www.renson.eu)

RENSON® Fabrications LTD  
Fairfax Units 1-5 • Bircholt Road • Parkwood Industrial Estate • Maidstone • Kent ME15 9SF  
Tel. 01622/754123 • Fax 01622/689478  
[info@rensonuk.net](mailto:info@rensonuk.net) • [www.renson.eu](http://www.renson.eu)



Creating healthy spaces